

VT 6360 CU

control unit brochure



VT 6360 CU control unit

Portable control unit with integrated 21.5" FullHD display, recorder, text inserter, microphone jack and external SDI+HDMI connector

Features

- ▶ The control unit is available with different, removable remote controls
- ▶ Possible to connect a crawler or manipulators
- ▶ Additional devices such as monitor and recorder can be connected to the video outputs of the control unit
- ▶ The control unit is well protected in the very robust "Peli Storm" trolley case - easy handling and convenient transport
- ▶ Option of adding texts and insertion of data - input of external incremental and encoder values for display in the video image
- ▶ Microphone for sound recording on the video

Applications



- ▶ Multifunctional control unit for cameras and manipulators from our product line

Technical specifications – VT 6360 CU control unit

This document is for general information only,
please consult the system manual for detailed specifications


Housing	petli storm case
Dimension	62.4x49.8x29.5 cm
Weight	23.5 kg
Video output	SDI/HDMI
Connections	data in / microphone in / camera
Power consumption	650 W
Input voltage	90-264 V AC / 47-63 Hz
Operating temperature	---
Recording	blackmagic video assist 5" 3G
Monitor	21.5"
Resolution	full HD
Brightness	250 cd/m2
Contrast	1,000:1
Reaction time	5 ms or better
Optionals	---
Features	---

* unit in mm

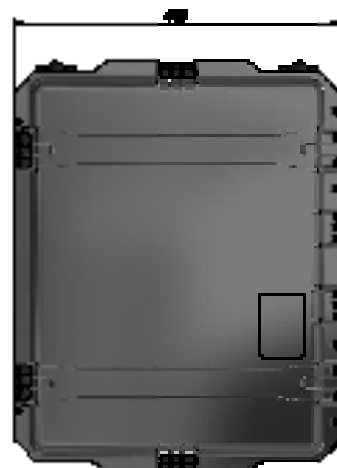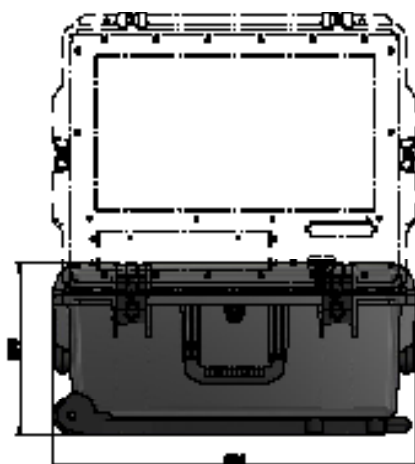

Setup

Possible combinations

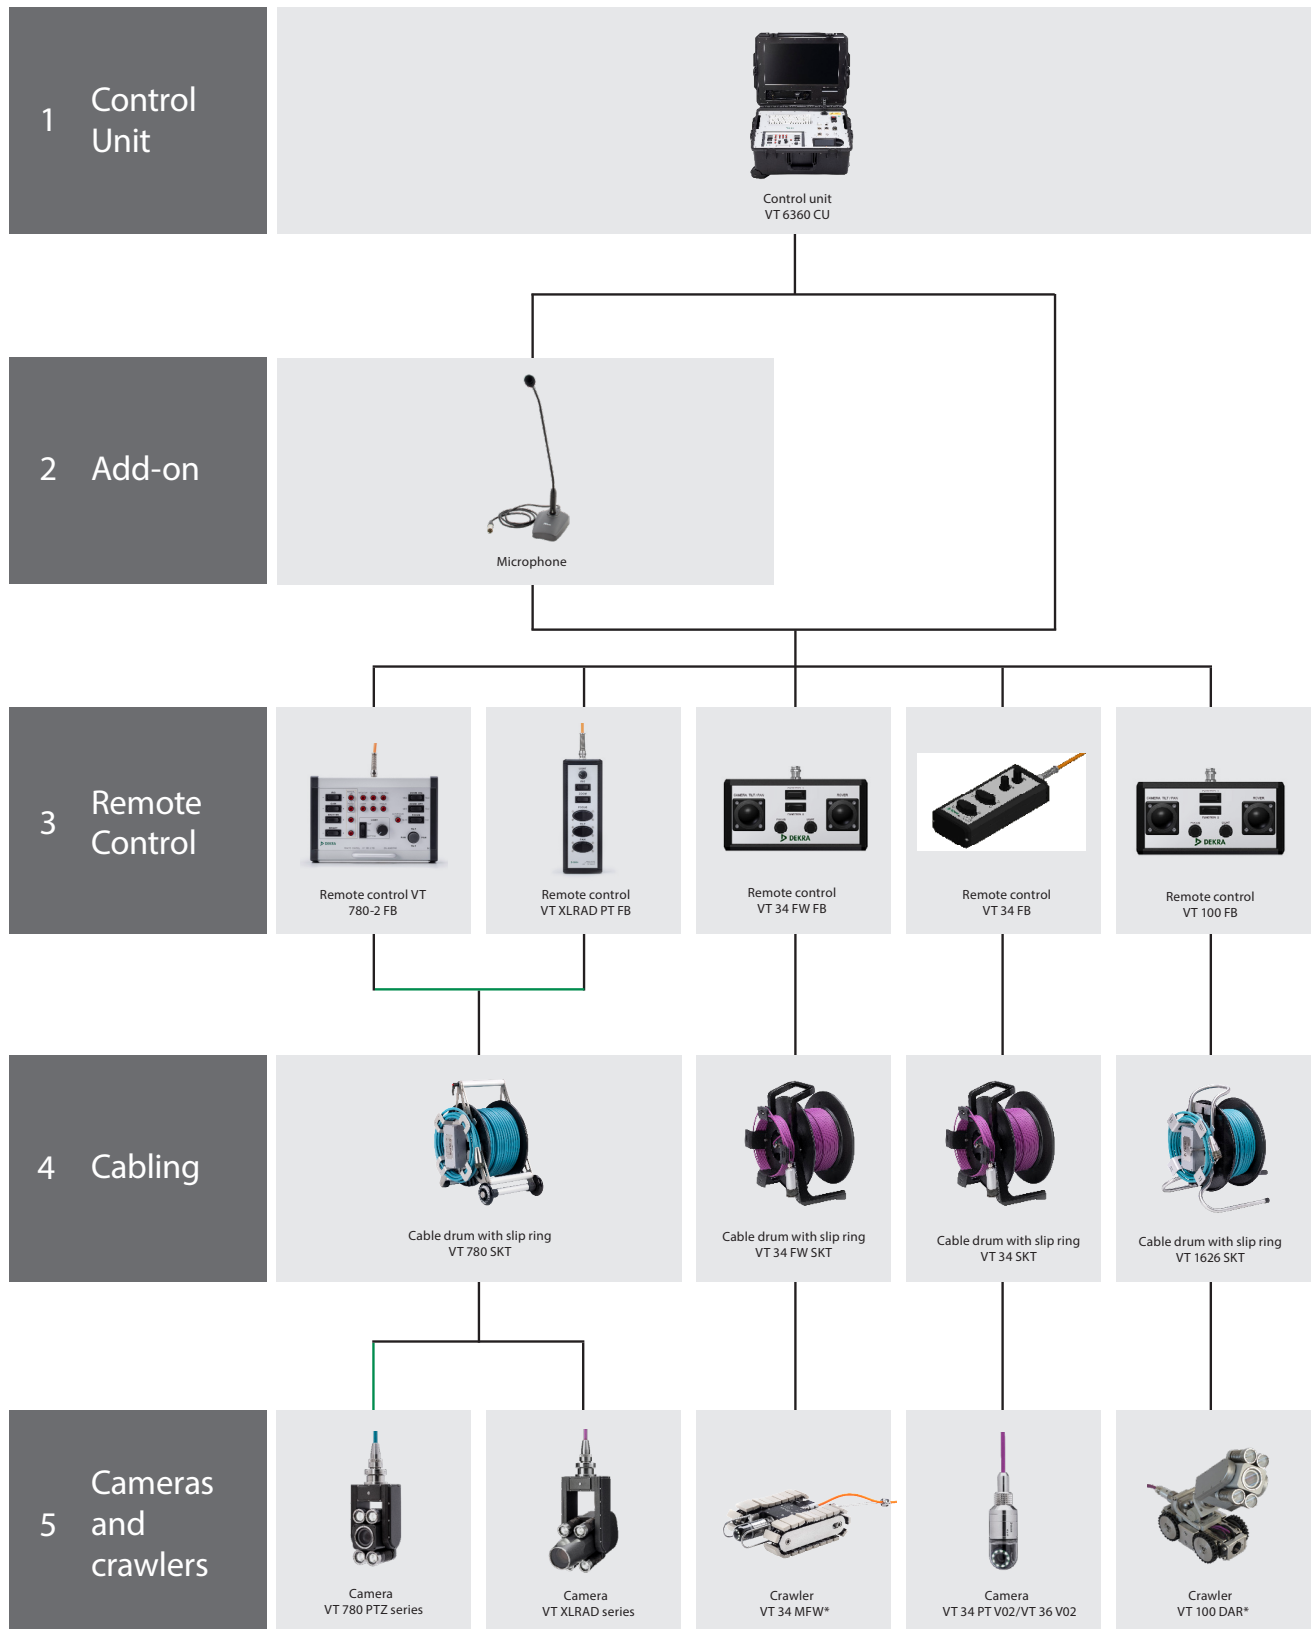

* extra power amplifier required
in the control unit

Overview



VT 6360 CU transport case



VT 6360 CU open



VT 6360 CU + VT XLRAD PT FB



VT 6360 CU + VT 780-2 FB



VT 6360 CU monitor



VT 6360 CU open, control panel

ISEC Visatec GmbH
Gewerbepark 7
87477 Sulzberg
Telephone +49 8376 9215-0
info@visatec.de
visatec.de