

VT 1 OCC Mo CU

Control Unit

Mobile Operation Control Center



VT 1 OCC Mo CU Camera Control Unit for Inspection Systems

Stand-alone control unit for the operation and control of supported camera systems. Provides power supply, camera control, video recording, snapshot capture, annotation, and on-screen overlay functions, with local or remote operation via dedicated control devices or network connection.

Features

- Stand-alone control unit with integrated display and operator controls
- Camera control, video recording and snapshot capture
- Annotation and on-screen overlay functionality
- Supports local and remote camera operation
- Compatible with multiple Visatec camera systems
- HDMI and USB connectivity for external devices and data transfer
- Rugged portable design with integrated carrying handle

Applications

- Operation and control of inspection camera systems
- Video recording and documentation of inspections
- Remote visual inspection in industrial and offshore environments
- Inspection support for maintenance, repair and FOSAR/FME operations

Compatible with 6 camera systems

VT 34/36 PT, VT 60 PTZC HD, VT 780 PTZC HD, VT RAD-3 PTZC, VT RAD-10 PTZC

Technical Specifications


This document is for general information only, please consult the system manual for detailed specifications

VT 1 OCC Mo CU Control Unit

Housing	Peli 1555 Air
Dimensions (HxWxD)	211 x 629 x 393 mm
Weight	18.4 kg
Input Voltage	90-264 VAC, 47-63 Hz
Power Consumption	*request additional information
Operating Temperature	0°...40°C
Connections	C14 power, MIL 18-32 camera, HDMI, Visatec controller, RJ45 PELCO controller, USB 2.0, 2 x USB 3.0, RJ45 LAN
Video Output	Built-in display, Full HD (1920 x 1080 px) output over HDMI
Recording	Built-in digital recording
Monitor	19" / 48,26 cm
Resolution	Full HD (1920 x 1080 px)
Brightness	1000 cd/m² (typical)
Contrast	1,000:1
Accessories	*request additional information
Features	*request additional information

Interfaces / Peripherals



Remote Control	Built-in, Visatec proprietary remote controller, PELCO remote controller, Remote control over Network
Cable Reel	VT 1 OCC SKT L / VT 1 OCC 34 SKT S
Camera	VT 34/36 PT, VT 60 PTZC HD, VT 780 PTZC HD, VT RAD-3 PTZC, VT RAD-10 PTZC

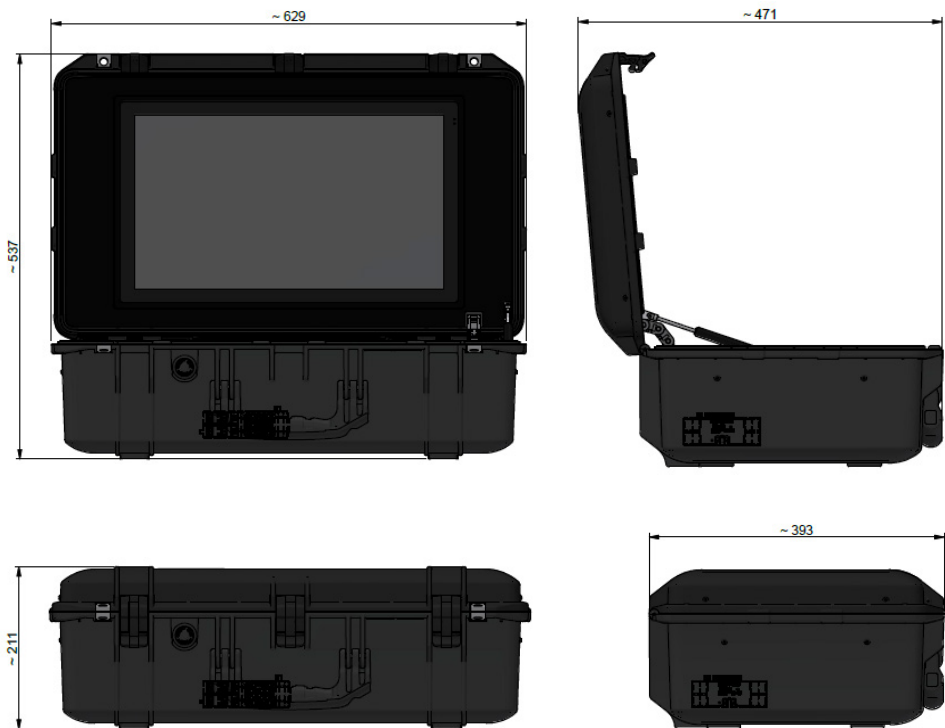

This document is for general information only, please consult the system manual for detailed specifications

VT 1 OCC SKT L Cable Reel

Dimensions (HxWxD)	466 x 387 x 338 mm
Weight	16.5 kg
Cable Length	5 + 45 m
Connections	MIL 18-32 on control unit side, MIL 16-26 on camera side
Connectors	MIL standard with stainless steel housing
Operating Temperature	0°... 50 °C

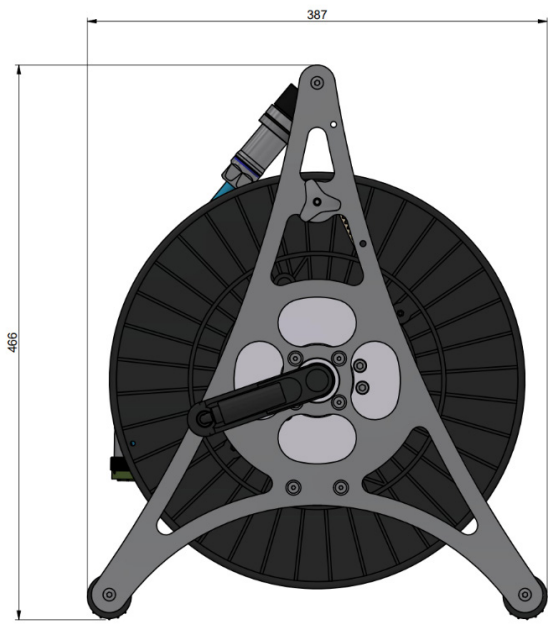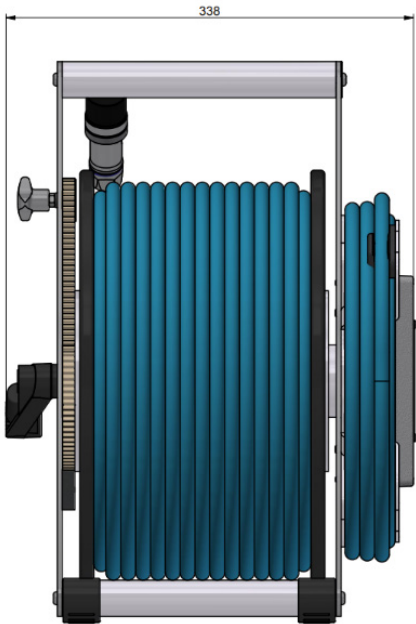



VT 1 OCC 34 SKT S Cable Reel

Cable for VT 34/36 PT camera

*Request additional information**

Setup

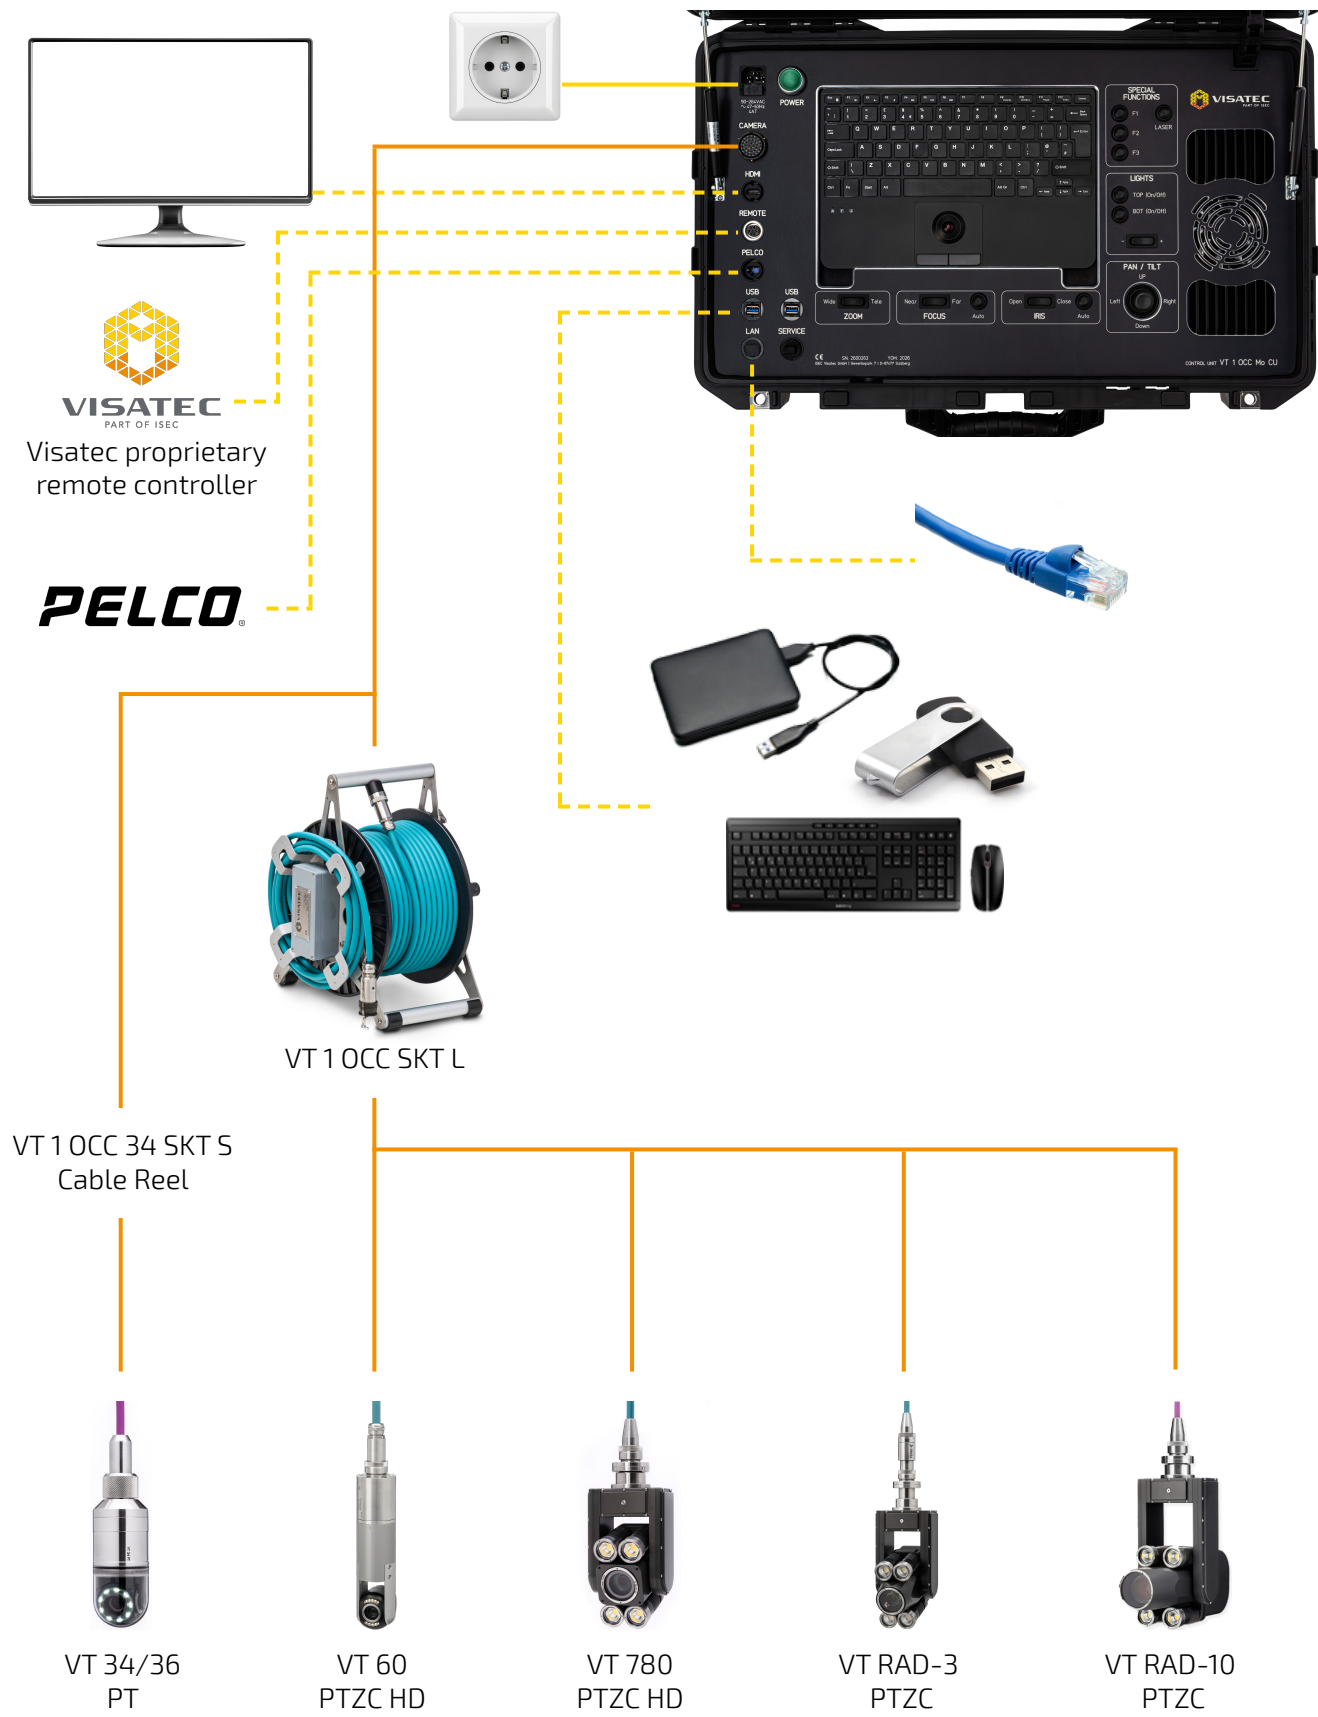



ISEC
MONITORING SYSTEMS



VISATEC
PART OF ISEC

ISEC Visatec GmbH

Gewerbepark 7

87477 Sulzberg

Telephone +49 8376 9215-0

sales@visatec.de

visatec.de